

Flush valve
PN10
WATER

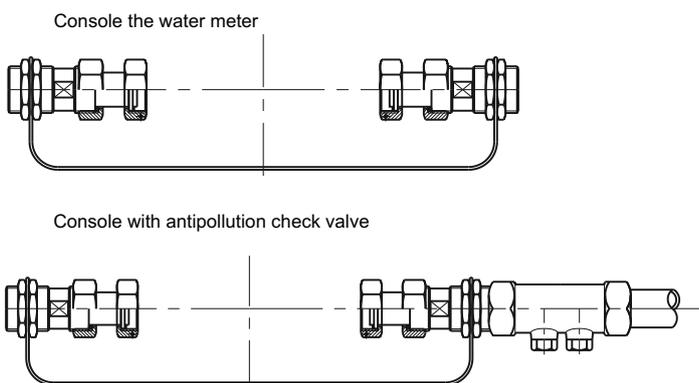

DN	G
[mm]	[cal]
20	3/4"

Product description (standard execution):

- Body made of pressed brass
- Seal based on EPDM
- Protection – chrome

Application:

Plumbing-toilets and washing facilities.
 Working pressure 1.0 MPa and temp. up to + 40°C

Flush valve
PN10
WATER


DN	G
[mm]	[cal]
15	3/4"
20	1"

Product description (standard execution):

- Bracket made of 1.0038 or 1.4301
- Sealing – EPDM
- Connectors made of pressed brass

Application:

Water lines networks: potable water with working pressure 1.0 MPa and temp. up to +70°C