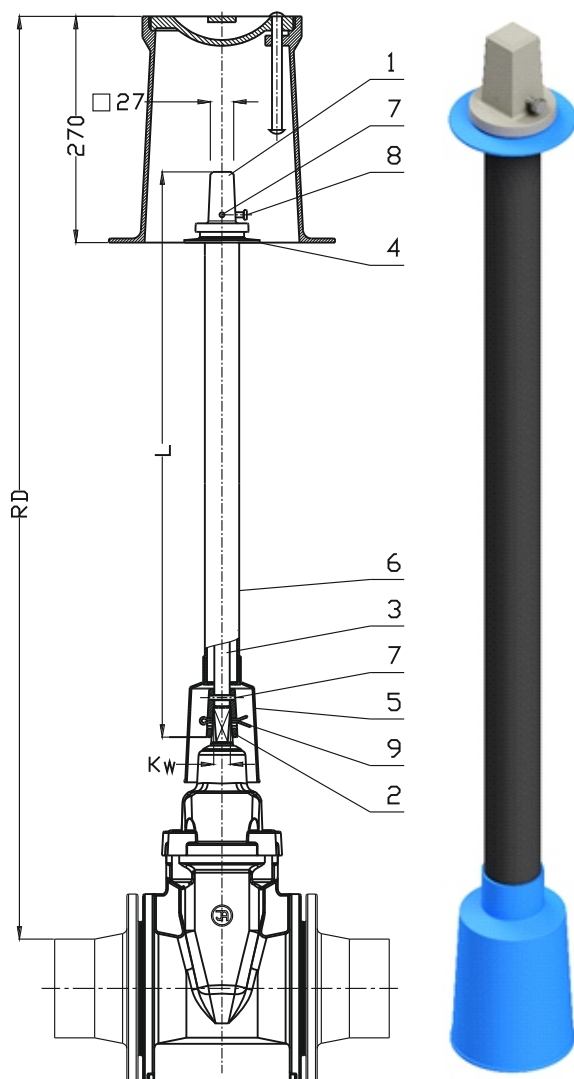


Extension spindle
rigid

PN10
PN16
SEWAGE
WATER


No.	Part	Standard execution
1	Cap	Ductile cast iron EN-GJS 400-15 EN 1560
2	Coupling	Ductile cast iron EN-GJS 400-15 EN 1560
3	Spindle (Rod)	Steel Fe/Zn5 EN 10027-2 Stainless steel(*) EN 10027-2
4	Collar	Polyethylene PE EN ISO 17855-1
5	Pipe bell	Polyethylene PE EN ISO 17855-1
6	Casing liner	Polyethylene PE EN ISO 17855-1
7	Spring pin	Steel Fe/Zn5; Stainless steel(*) EN ISO 8752
8	Screw	Steel Fe/Zn5; Stainless steel(*) EN ISO 4017
9	Split cotter	Steel Fe/Zn5; Stainless steel(*) EN ISO 1234
(*) - other material variants on special request		

Product description (standard execution):

- The possibility of shortening the mounting surface area
- Cap made of ductile cast iron EN-GJS 400-15
- Galvanized steel square section 18mm
- Ductile cast iron EN-GJS-400-15 coupling mounted on the valve spindle with the split cotter
- Extension spindle liner cap pipe bell and thrust washer made of PE
- Pipe bell protects against dirt penetration from the ground

Application:

Simple and rigid extension of the valve spindle.
Underground mounted Armature operating.

Accessories:

With pillar handwheel see: 9113
With pillar for electric actuator see: 9114
With T-key see: 9015
With street box see: 9501; 9502; 9503; 9504; 9509

TYP 9010		L [mm] / Weight [kg]					
DN	K _w	RD 750	RD 1000	RD 1250	RD 1500	RD 2000	RD 2500
25	12	437	687	937	1187	1687	2187
		1,8	2,5	3,1	3,8	5,1	6,5
32	12	459	709	959	1209	1709	2209
		1,9	2,6	3,2	3,8	5,2	6,6
40	12,14	392	642	892	1142	1642	2142
		1,7	2,4	3,0	3,6	5,0	6,4
50	12,14	387	637	887	1137	1637	2137
		1,7	2,4	3,0	3,6	5,0	6,4
65	17	366	616	866	1116	1616	2116
		1,6	2,3	3,0	3,7	5,1	6,5
80	17	348	598	848	1098	1598	2098
		1,5	2,2	2,9	3,6	5,0	6,4
100	19	323	573	823	1073	1573	2073
		1,5	2,2	2,9	3,6	5,0	6,4
125	19	296	546	796	1046	1546	2046
		1,4	2,1	2,8	3,5	4,9	6,3
150	19	-	467	717	967	1467	1967
		-	1,9	2,6	3,3	4,7	6,1
200	24	-	447	697	947	1447	1947
		-	2,6	3,4	4,2	5,9	7,6
250	27	-	374	624	874	1374	1874
		-	2,3	3,1	4,0	5,7	7,4
300	27	-	325	575	825	1325	1825
		-	2,1	2,9	3,8	5,5	7,2
350	27	-	268	518	768	1268	1768
		-	1,9	2,7	3,6	5,3	7,0
400	32	-	-	332	582	1082	1582
		-	-	3,2	4,5	7,1	9,8
500	36	-	-	-	427	927	1427
		-	-	-	3,8	6,4	9,1
600	36	-	-	-	308	808	1308
		-	-	-	3,1	5,8	8,4

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development