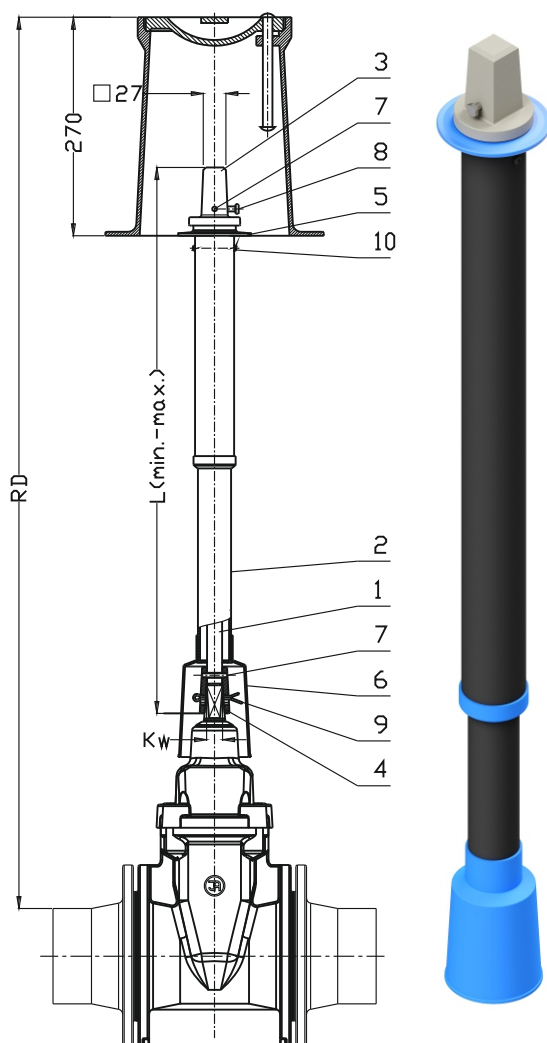


Telescopic extension spindle
**PN10
PN16**
SEWAGE
WATER


No.	Part	Standard execution
1	Spindle(Rod)	Steel Fe/Zn5 EN 10027-2 Stainless steel (*) EN 10027-2
2	Casing liner	Polyethylene PE EN ISO 17855-1
3	Cap	Ductile cast iron EN-GJS 400-15 EN 1560
4	Coupling	Ductile cast iron EN-GJS 400-15 EN 1560
5	Collar	Polyethylene PE EN ISO 17855-1
6	Pipe bell	Polyethylene PE EN ISO 17855-1
7	Spring pin	Steel Fe/Zn5, Stainless steel (*) EN ISO 8752
8	Screw	Steel Fe/Zn5, Stainless steel (*) EN ISO 4017
9	Split cotter	Steel Fe/Zn5, Stainless steel (*) EN ISO 1234
10	Screw	Steel Fe/Zn5, Stainless steel (*) EN ISO 7049

(*) - other material variants on special request

Product description (standard execution):

- Spindle secured against tearing, the ability to adapt to the terrain in the given range
- Cap made of ductile cast iron EN-GJS 400-15
- The spindle tightly fitted into the square profile
- The coupling of ductile iron EN-GJS 400-15 mounted on the valve stem with the split cotter
- Casing liner cup pipe bell and thrust washer made of PE
- Pipe bell protects against pollution from the ground
- Height adjuster for setting casing at any height

Application:

Flexible and safe extension of the valve stem. Underground mounted

Accessories:

With pillar handwheel see: 9113
With pillar for electric actuator see: 9114
With T-key see: 9015
With street box see: 9501; 9502; 9503; 9504; 9509

TYP 9011		RD		RD		RD		RD		RD	
		600-900		900-1300		1300-1800		2000-2500		2500-3100	
DN	Kw	L _(min)	L _(max)	L _(min)	L _(max)	L _(min)	L _(max)	L _(min)	L _(max)	L _(min)	L _(max)
		[mm]		[mm]		[mm]		[mm]		[mm]	
		Weight [kg]		Weight [kg]		Weight [kg]		Weight [kg]		Weight [kg]	
25	12	RD 750-925	RD 925-1300	986	1486	1686	2186	2237	2837		
		436 611	611 996								
32	12	RD 725-925	RD 925-1300	1008	1508	1708	2208	2259	2859		
		433 633	633 1008								
40	12, 14	RD 775-950	RD 950-1300	941	1441	1641	2141	2198	2798		
		416 591	591 941								
50	12, 14	RD 775-950	RD 950-1300	936	1436	1636	2136	2193	2793		
		411 586	586 936								
65	17	RD 975-1300	RD 1300-1800	915	1415	1615	2115	2166	2766		
		590 915	915 1415								
80	17	RD 975-1300	RD 1300-1800	897	1397	1597	2097	2148	2748		
		572 897	897 1397								
100	19	RD 1000-1300	RD 1300-1800	872	1372	1572	2072	2123	2723		
		572 872	872 1372								
125	19	RD 1000-1300	RD 1300-1800	845	1345	1545	2045	2096	2696		
		545 845	845 1345								
150	19	RD 1050-1300	RD 1300-1800	766	1266	1466	1966	2017	2617		
		516 766	766 1266								
200	24	RD 1075-1325	RD 1325-1800	751	1226	1426	1926	1965	2565		
		501 751	751 1226								
250	27	RD 1125-1350	RD 1350-1800	703	1153	1353	1853	1892	2492		
		478 703	703 1153								
300	27	RD 1175-1375	RD 1375-1800	679	1104	1304	1804	1843	2443		
		479 679	679 1104								
350	27	RD 1400-1800	RD 1800-2500	647	1047	1247	1747	1786	2386		
		447 647	647 1047								
400	32	RD 1525-1800	RD 1800-2500	607	882	1082	1582	1582	2182		
		527 607	607 882								
500	36	RD 1600-1800	RD 1800-2500	527	727	927	1427	1427	2027		
		458 527	527 727								
600	36	RD 1650-1800	RD 1800-2500	458	608	808	1308	1308	1908		
		458 458	458 608								

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development