


## Flange and double-socket tee connector MMA

**PN10**  
**PN16**
**SEWAGE**
**WATER**


Flange and double-socket tee  
connector MMA 9205

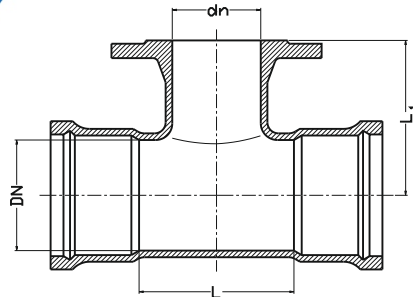

| DN   | dn  | L   | L <sub>1</sub> | Weight | DN   | dn  | L   | L <sub>1</sub> | Weight |
|------|-----|-----|----------------|--------|------|-----|-----|----------------|--------|
| [mm] |     |     |                | [kg]   | [mm] |     |     |                | [kg]   |
| 80   | 80  | 170 | 165            | 13     | 300  | 150 | 260 | 310            | 56     |
| 100  | 50  | 155 | 155            | 13     | 300  | 200 | 320 | 320            | 65     |
| 100  | 80  | 175 | 175            | 15     | 300  | 300 | 435 | 340            | 86     |
| 100  | 100 | 190 | 180            | 16     | 400  | 80  | 190 | 355            | 85     |
| 150  | 80  | 180 | 200            | 21     | 400  | 100 | 210 | 360            | 87     |
| 150  | 100 | 200 | 205            | 23     | 400  | 150 | 270 | 370            | 100    |
| 150  | 150 | 260 | 220            | 28     | 400  | 200 | 330 | 380            | 105    |
| 200  | 80  | 180 | 225            | 29     | 400  | 250 | 390 | 390            | 114    |
| 200  | 100 | 200 | 230            | 31     | 400  | 300 | 420 | 400            | 117    |
| 200  | 150 | 260 | 245            | 37     | 400  | 400 | 560 | 420            | 158    |
| 200  | 200 | 320 | 260            | 43     | 500  | 100 | 215 | 420            | 107    |
| 250  | 80  | 185 | 265            | 38     | 500  | 150 | 275 | 430            | 132    |
| 250  | 100 | 205 | 270            | 40     | 500  | 200 | 330 | 440            | 138    |
| 250  | 150 | 260 | 280            | 45     | 500  | 300 | 450 | 460            | 172    |
| 250  | 200 | 315 | 290            | 53     | 500  | 500 | 650 | 500            | 246    |
| 250  | 250 | 380 | 300            | 62     | 600  | 200 | 340 | 500            | 197    |
| 300  | 80  | 185 | 295            | 48     | 600  | 600 | 770 | 580            | 345    |
| 300  | 100 | 205 | 300            | 50     | -    | -   | -   | -              | -      |

### Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, minimum 250 microns according to EN ISO 12944-5
- Flange connection according to EN 1092-2 (DIN 2501), pressure PN10, PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16


### Application:

In water supply systems, potable water and other chemically inert liquids as well as raw or industrial sewage

## Socket tee connector MMB

**PN10**  
**PN16**
**SEWAGE**
**WATER**


Socket tee MMB 9206

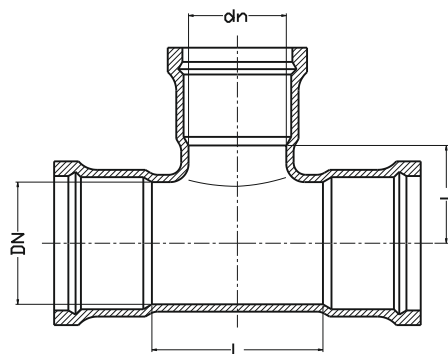

| DN   | dn  | L   | L <sub>1</sub> | Weight |
|------|-----|-----|----------------|--------|
| [mm] |     |     |                | [kg]   |
| 100  | 80  | 170 | 95             | 13     |
| 100  | 100 | 190 | 95             | 14     |
| 150  | 80  | 180 | 120            | 20     |
| 150  | 100 | 200 | 125            | 21     |
| 150  | 150 | 260 | 130            | 26     |
| 200  | 80  | 180 | 145            | 26     |
| 200  | 100 | 200 | 150            | 29     |
| 200  | 150 | 260 | 155            | 34     |
| 200  | 200 | 320 | 160            | 39     |
| 250  | 100 | 200 | 170            | 45     |
| 250  | 150 | 260 | 175            | 51     |
| 250  | 200 | 320 | 185            | 57     |
| 250  | 250 | 380 | 190            | 64     |
| 300  | 150 | 260 | 205            | 66     |
| 300  | 200 | 320 | 205            | 73     |
| 300  | 300 | 440 | 220            | 99     |

### Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, minimum 250 microns according to EN ISO 12944-5
- Flange connection according to EN 1092-2 (DIN 2501), pressure PN10, PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

### Application:

In water supply systems, potable water and other chemically inert liquids as well as raw or industrial sewage

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development