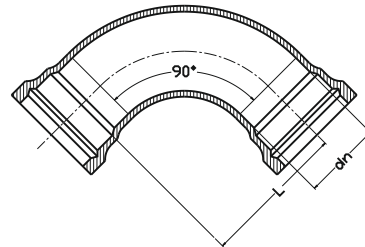


Socket bend Type MMQ
PN10
PN16
WATER


Socket bend MMQ 9208


Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, to EN 14901
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:

In water supply systems, potable water and other chemically inert liquids as well as raw or industrial sewage

| dn | L | Weight |
|------|-----|--------|
| [mm] | | [kg] |
| 80 | 98 | 9 |
| 100 | 120 | 11 |
| 150 | 160 | 23 |
| 200 | 220 | 35 |
| 250 | 240 | 54 |
| 300 | 280 | 79 |
| 400 | 400 | 126 |
| 500 | 500 | 237 |
| 600 | 600 | 312 |

Socket bend Type MMK
PN10
PN16
WATER


Socket bend MMK 9210

Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, to EN 14901
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:

In water supply systems, potable water and other chemically inert liquids as well as raw or industrial sewage

| dn | L | Weight | L | Weight | L | Weight | L | Weight |
|------|--------|--------|-------|--------|------|--------|------|--------|
| [mm] | | [kg] | [mm] | [kg] | [mm] | [kg] | [mm] | [kg] |
| kąt | 11,25° | | 22,5° | | 30° | | 45° | |
| 80 | 30 | 6,5 | 40 | 7,0 | 50 | 7,0 | 60 | 7,5 |
| 100 | 30 | 8,0 | 40 | 9,0 | 55 | 9,0 | 65 | 9,0 |
| 150 | 55 | 14,0 | 70 | 14,0 | 75 | 15,0 | 75 | 16,0 |
| 200 | 40 | 20,0 | 65 | 21,0 | 80 | 22,0 | 90 | 25,0 |
| 250 | 55 | 27,5 | 80 | 30,0 | 80 | 32,0 | 110 | 36,0 |
| 300 | 55 | 36,5 | 85 | 40,5 | 110 | 43,0 | 150 | 48,0 |
| 400 | 65 | 75,0 | 110 | 86,0 | 130 | 87,0 | 185 | 95,0 |
| 500 | 75 | 95,0 | 130 | 102,0 | 180 | 115,0 | 240 | 132,0 |
| 600 | 85 | 138,0 | 150 | 151,0 | 215 | 170,0 | 285 | 245,0 |

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development