


Flanged bend Type Q

PN10
PN16

WATER



Flanged bend Type Q 9207

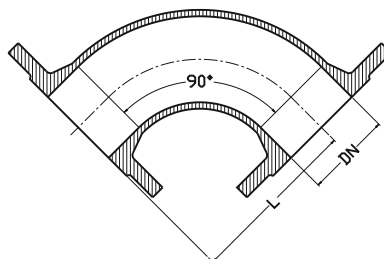

DN	L	Weight
	[mm]	[kg]
50	150	7
65	165	10
80	165	10
100	180	13
125	200	18
150	220	20
200	260	32
250	350	50
300	400	70
350	450	105
400	500	114
500	600	180
600	700	270
800	900	527

Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, to EN 14901
- Flange connection and connector according to EN 1092-2 (DIN 2501), pressure PN10 PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:

In water supply systems, potable water and other chemically inert liquids as well as raw or industrial sewage


Flanged bend Type FFK

PN10
PN16

WATER



Flanged bend Type FFK 9209



Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, to EN 14901
- Flange connection and connector according to EN 1092-2 (DIN 2501), pressure PN10 PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:

In water supply systems, potable water and other chemically inert liquids as well as raw or industrial sewage

DN	L	Weight	L	Weight	L	Weight	L	Weight
[mm]	[mm]	[kg]	[mm]	[kg]	[mm]	[kg]	[mm]	[kg]
Angle	11,25°		22,5°		30°		45°	
80	130	9,0	130	9,0	130	10,0	130	10,0
100	140	11,5	140	11,5	140	12,0	140	12,0
150	160	18,5	160	18,5	160	20,0	160	20,0
200	180	28,0	180	28,0	180	29,0	180	29,0
250	210	45,0	210	45,0	210	45,0	350	62,0
300	255	60,0	255	60,0	255	60,0	400	77,0
400	205	75,1	239	81,2	240	81	324	95,2

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development