


**Pipe strap  
for water lines**

**PN16**

**WATER**



Pipe strap DN100

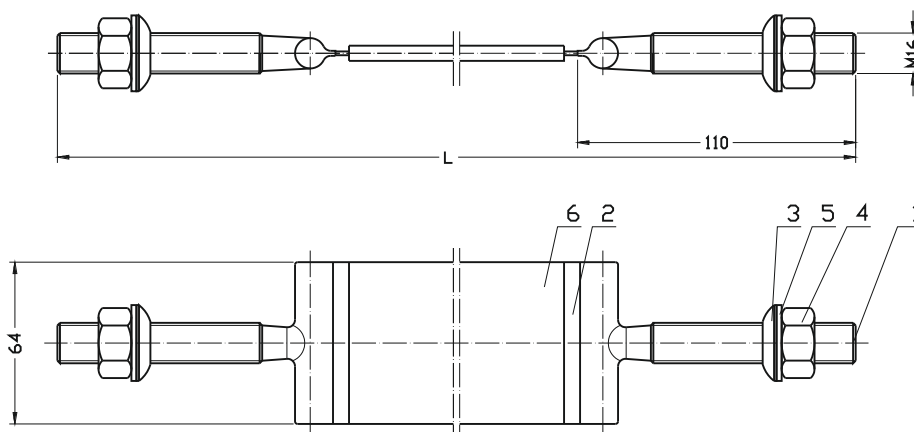

No.	Part	Standard
1	Bolt	Stainless steel A2 EN ISO 4762
2	Rubber mat	Rubber EPDM EN ISO 1629
3	Bracket	Stainless steel A2 EN 10027-2
4	Nut	Stainless steel A4 EN ISO 4032
5	Washer	Stainless steel A2 EN ISO 7091
6	Clamp	Stainless steel EN 10027-2

DN	Pipe range(*)	L	Weight
	[mm]		[kg]
80	88-104	395	0,7
100	108-120	450	0,7
125	133-149	515	0,8
150	159-184	598	0,9
175	191-213	680	0,9
200	216-234	752	1,1
225	241-259	832	1,1
250	267-298	920	1,2
300	318-340	1044	1,4
300	340-370	1122	1,4
350	378-412	1247	1,5
400	406-429	1315	1,6
450	470-480	1420	1,7
500	508-532	1630	2,0
600	610-635	1945	2,3
700	710-738	2270	2,8
800	812,8	2540	3,2
800	848	2660	3,3

(\*) by customer requirements

**Product description (standard execution):**

- Strap made of acid proof steel
- Shape of rubber gasket EPDM provide good contact even in places with small defects irregularities, pitting resulting of corrosion
- Tie screws made of stainless steal
- Face to face according to producer documentation
- Product marking according to: EN 19; EN 1074

**Test control:**

Water and sewage networks and tanks. Transport of non aggressive liquids.  
Working conditions:  
temp. up +70°C  
pressure up to 1,6 MPa

**Installation:**

